Venta de Maquinaria Industrial y Agrícola
Km 24 Carr. Alvaro Obregón
Cd. Cuauhtemoc, Chih.

Tels: (625) 586 6477 y 52 (625) 586 6412
Cels: (625) 590 8941 - (625) 115 4764 - (625) 134 4523
Cels: (625) 100 1010 - (625) 283 9741
E-mails: awiebe71@hotmail.com, ventas@maquinariaw.com.mx

No. Folio: 12104 — TENSOR PARA CABLE

SHERMAN REILLY	PT2766BV	1981	681210 630

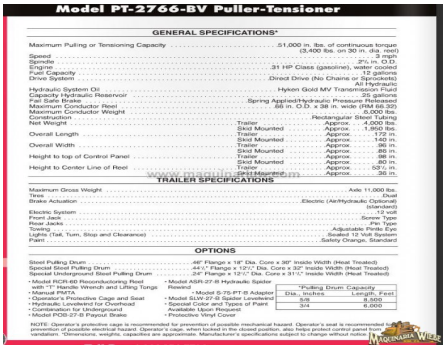

Model PT-2766-BV Puller-Tensioner

GENERAL SPECIFICATIONS*

Maximum Pulling or Tensioning Capacity	51,000 in. lbs. of continuous torque (3,400 lbs. on 30 in. dia. reel)
Speed	3 mph
Spindle	2½ in. O.D.
Engine	31 HP Class (gasoline), water cooled
Fuel Capacity	25 gallons
Drive System	Direct Drive (No Chains or Sprockets) All Hydraulic
Hydraulic System Oil	Hyken Gold MV Transmission Fluid
Capacity Hydraulic Reservoir	25 gallons
Fail Safe Brake	Spring Applied/Hydraulic Pressure Release
Maximum Conductor Reel	66 in. O.D. x 38 in. wide (RM 66.32)
Maximum Conductor Weight	5,000 lbs.
Construction	Rectangular Steel Tubing
Net Weight	Trailer Approx. 4,000 lbs. Skid Mounted Approx. 1,800 lbs.
Overall Length	Trailer Approx. 172 in. Skid Mounted Approx. 140 in.
Overall Width	Trailer Approx. 36 in. Skid Mounted Approx. 88 in.
Height to top of Control Panel	Trailer Approx. 80 in. Skid Mounted Approx. 80 in.
Height to Center Line of Reel	Trailer Approx. 52½ in. Skid Mounted Approx. 36 in.

TRAILER SPECIFICATIONS

Maximum Gross Weight	Axle 11,000 lbs.
Tires	Dual
Brake Actuation	Electric (Air/Hydraulic Optional) (Standard)
Electric System	12 volt
Front Jack	Screw Type
Rear Jacks	Pin Type
Towing	Adjustable Ball Eye
Lights (Tail, Turn, Stop and Clearance)	Sealed 12 Volt System
Paint	Safety Orange, Standard

OPTIONS

- Steel Pulling Drum ..... 48" Flange x 18" Dia. Core x 36" Inside Width (Heat Treated)
- Special Steel Pulling Drum ..... 44½" Flange x 12½" Dia. Core x 32" Inside Width (Heat Treated)
- Special Underground Steel Pulling Drum ..... 24" Flange x 12½" Dia. Core x 31½" Inside Width (Heat Treated)
- Model RCR-60 Reconductoring Reel with "T" Handle Wrench and Lifting Tongs
- Manual PMTA
- Operator's Protective Cage and Seat
- Hydraulic Lowdend for Overhead
- Combination for Underground
- Model PCS-27-B Payout Brake
- Model ASR-27-B Hydraulic Spider Rewind
- Model S-75-PT-B Adapter
- Model S-Rewind Lowdend
- Special Color and Types of Paint Available Upon Request
- Protective Vinyl Cover

*Pulling Drum Capacity	
Dia., Inches	Length, Feet
5/8	8,500
3/4	6,000

NOTE: Operator's protective cage is recommended for prevention of possible mechanical hazard. Operator's seat is recommended for prevention of possible electrical hazard. Operator's cage, when locked in the closed position, also helps protect control panel from vandalism. *Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.

Vendido