Venta de Maquinaria Industrial y Agrícola
Km 24 Carr. Alvaro Obregón
Cd. Cuauhtemoc, Chih.

Tels: (625) 586 6477 y 52 (625) 586 6412
Cels: (625) 590 8941 - (625) 115 4764 - (625) 134 4523
Cels: (625) 100 1010 - (625) 283 9741
E-mails: awiebe71@hotmail.com, ventas@maquinariaw.com.mx

No. Folio: 12104 Tensor para cable Sherman Reilly PT2766BV

SHERMAN REILLY	PT2766BV	1981	681210 630



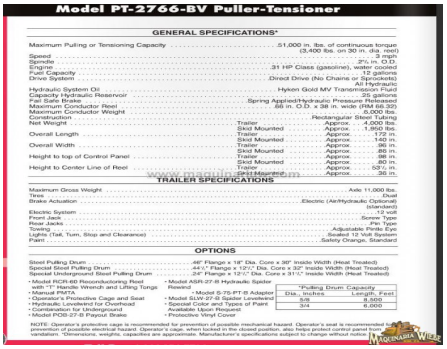

Model PT-2766-BV Puller-Tensioner

GENERAL SPECIFICATIONS*

Maximum Pulling or Tensioning Capacity		51,000 in. lbs. of continuous torque (3,400 lbs. on 30 in. dia. reel)
Speed		3 mph
Spindle		2⅞ in. O.D.
Engine		31 HP Class (gasoline), water cooled
Fuel Capacity		12 gallons
Drive System		Direct Drive (No Chains or Sprockets) All Hydraulic
Hydraulic System Oil		Hyken Gold MV Transmission Fluid
Capacity Hydraulic Reservoir		25 gallons
Fail Safe Brake		Spring Applied/Hydraulic Pressure Released
Maximum Conductor Reel		66 in. O.D. x 38 in. wide (RM 68.32)
Maximum Conductor Weight		6,000 lbs.
Construction		Rectangular Steel Tubing
Net Weight	Trailer	Approx. 4,000 lbs.
	Skid Mounted	Approx. 1,950 lbs.
Overall Length	Trailer	Approx. 172 in.
	Skid Mounted	Approx. 140 in.
Overall Width	Trailer	Approx. 96 in.
	Skid Mounted	Approx. 80 in.
Height to top of Control Panel	Trailer	Approx. 88 in.
	Skid Mounted	Approx. 80 in.
Height to Center Line of Reel	Trailer	Approx. 53½ in.
	Skid Mounted	Approx. 36 in.

TRAILER SPECIFICATIONS

Maximum Gross Weight	Axle 11,000 lbs.
Tires	Dual
Brake Actuation	Electric (Air/Hydraulic Optional) (standard)
Electric System	12 volt
Front Jack	Screw Type
Rear Jacks	Pin Type
Towing	Adjustable Pintle Eye
Lights (Tail, Turn, Stop and Clearance)	Sealed 12 Volt System
Paint	Safety Orange, Standard

OPTIONS

Steel Pulling Drum	46" Flange x 18" Dia. Core x 36" Inside Width (Heat Treated)
Special Steel Pulling Drum	44½" Flange x 12½" Dia. Core x 32" Inside Width (Heat Treated)
Special Underground Steel Pulling Drum	24" Flange x 12½" Dia. Core x 31½" Inside Width (Heat Treated)
• Model RCR-60 Reconductoring Reel with "T" Handle Wrench and Lifting Tongs	• Model ASR-27-B Hydraulic Spider Rewind
• Manual PMTA	• Model S-75-PT-B Adapter
• Operator's Protective Cage and Seat	• Model SUV-27-B Spider Levelwind
• Hydraulic Levelwind for Overhead	• Special Color and Types of Paint
• Combination for Underground	Available Upon Request
• Model POS-27-B Payout Brake	• Protective Vinyl Cover

*Pulling Drum Capacity	
Dia., Inches	Length, Feet
5/8	8,500
3/4	6,000

NOTE: Operator's protective cage is recommended for prevention of possible mechanical hazard. Operator's seat is recommended for prevention of possible electrical hazard. Operator's cage, when locked in the closed position, also helps protect control panel from vandalism. *Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.



Vendido