Venta de Maquinaria Industrial y Agrícola
Km 24 Carr. Alvaro Obregón
Cd. Cuauhtemoc, Chih.


Tels: (625) 586 6477 y 52 (625) 586 6412
Cels: (625) 590 8941 - (625) 115 4764 - (625) 134 4523
Cels: (625) 100 1010 - (625) 283 9741
E-mails: awiebe71@hotmail.com, ventas@maquinariaw.com.mx

No. Folio: 15796 — Compactador de plancha Stanley HS6000

Stanley	HS6000	0000	1313





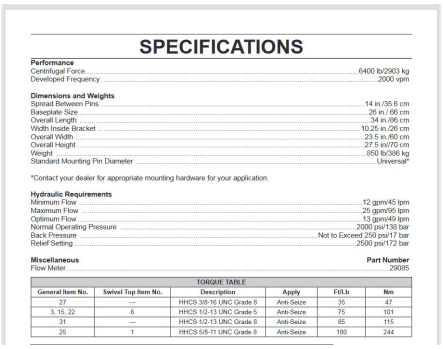

SPECIFICATIONS

Performance
Centrifugal Force ..... 6400 lb/2903 kg
Developed Frequency ..... 2000 vpm

Dimensions and Weights
Spread Between Pins ..... 14 in./35.6 cm
Baseplate Size ..... 26 in./66 cm
Overall Length ..... 34 in./86 cm
Width Inside Bracket ..... 10.25 in./26 cm
Overall Width ..... 23.5 in./60 cm
Overall Height ..... 27.5 in/70 cm
Weight ..... 850 lb/386 kg
Standard Mounting Pin Diameter ..... Universal*

*Contact your dealer for appropriate mounting hardware for your application.

Hydraulic Requirements
Minimum Flow ..... 12 gpm/45 lpm
Maximum Flow ..... 25 gpm/95 lpm
Optimum Flow ..... 13 gpm/49 lpm
Normal Operating Pressure ..... 2000 psi/138 bar
Back Pressure ..... Not to Exceed 250 psi/17 bar
Relief Setting ..... 2500 psi/172 bar

Miscellaneous **Part Number**
Flow Meter 29085

TORQUE TABLE

General Item No.	Swivel Top Item No.	Description	Apply	Ft/Lb	Nm
27	---	HHCS 3/8-16 UNC Grade 8	Anti-Seize	35	47
3, 15, 22	6	HHCS 1/2-13 UNC Grade 5	Anti-Seize	75	101
31	---	HHCS 1/2-13 UNC Grade 8	Anti-Seize	85	115
25	1	HHCS 5/8-11 UNC Grade 8	Anti-Seize	180	244

Plancha compactadora de 30X22, compactador para retroexcavdaora, peso 850 LBS, - -