Venta de Maquinaria Industrial y Agrícola
Km 24 Carr. Alvaro Obregón
Cd. Cuauhtemoc, Chih.

Tels: (625) 586 6477 y 52 (625) 586 6412
Cels: (625) 590 8941 - (625) 115 4764 - (625) 134 4523
Cels: (625) 100 1010 - (625) 283 9741
E-mails: awiebe71@hotmail.com, ventas@maquinariaw.com.mx

No. Folio: 13875 — Trituradora de ramas Bandit 200XP

Bandit	200XP	2011	4FMUS1619AR023962

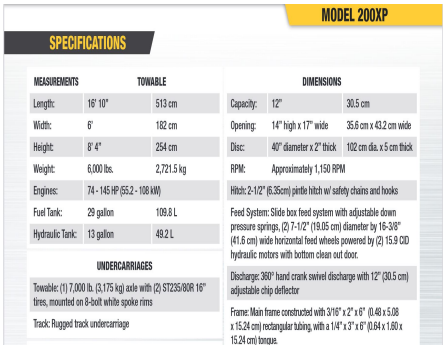

MODEL 200XP

SPECIFICATIONS

MEASUREMENTS	TOWABLE	
Length:	16' 10"	513 cm
Width:	6'	182 cm
Height:	8' 4"	254 cm
Weight:	6,000 lbs.	2,721.5 kg
Engines:	74 - 145 HP (55.2 - 108 kW)	
Fuel Tank:	29 gallon	109.8 L
Hydraulic Tank:	13 gallon	49.2 L

UNDERCARRIAGES

Towable: (1) 7,000 lb. (3,175 kg) axle with (2) ST235/80R 16" tires, mounted on 8-bolt white spoke rims

Track: Rugged track undercarriage

DIMENSIONS		
Capacity:	12"	30.5 cm
Opening:	14" high x 17" wide	35.6 cm x 43.2 cm wide
Disc:	40" diameter x 2" thick	102 cm dia. x 5 cm thick
RPM:	Approximately 1,150 RPM	

Hitch: 2-1/2" (6.35cm) pintle hitch w/ safety chains and hooks

Feed System: Slide box feed system with adjustable down pressure springs, (2) 7-1/2" (19.05 cm) diameter by 16-3/8" (41.6 cm) wide horizontal feed wheels powered by (2) 15.9 CID hydraulic motors with bottom clean out door.

Discharge: 360° hand crank swivel discharge with 12" (30.5 cm) adjustable chip deflector

Frame: Main frame constructed with 3/16" x 2" x 6" (0.48 x 5.08 x 15.24 cm) rectangular tubing, with a 1/4" x 3" x 6" (0.64 x 1.60 x 15.24 cm) tongue.

Con motor a diesel 74 HP, para troncos de 12 pulgadas, peso 6,000 LBS