- Venta de Maquinaria Industrial y Agrícola -
Km 24 Carr. Alvaro Obregón
Cd. Cuauhtemoc, Chih.

Tels: (625) 586 6477 y 52 (625) 586 6412
Cels: 625) 590 8941 - (625) 115 4764 - (625) 134 4523
Cels: (625) 100 1010 - (625) 283 9741
E-mails: awiebe71@hotmail.com, ventas@maquinariaw.com.mx

No. Folio: 15367 **MOTACARGAS TELESCOPICO**

GENIE	GTH1056	2008	GTH1008A12637

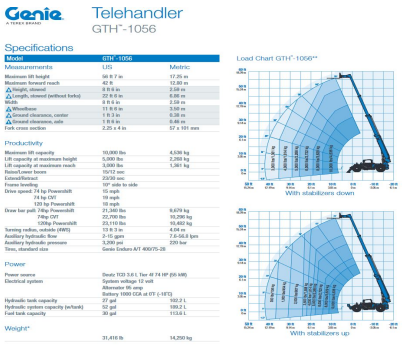

Genie Telehandler
GTH™-1056

Specifications

Model	GTH™-1056	
Measurements	US:	Metric:
Maximum lift height	56 ft 7 in	17.25 m
Maximum forward reach	42 ft	12.80 m
⚠ Height, stowed	8 ft 6 in	2.59 m
⚠ Length, stowed (without forks)	22 ft 0 in	6.68 m
Width	8 ft 6 in	2.59 m
⚠ Wheelbase	11 ft 6 in	3.50 m
⚠ Ground clearance, center	1 ft 3 in	0.38 m
⚠ Ground clearance, axle	1 ft 6 in	0.46 m
Fork cross section	2.25 x 4 in	57 x 101 mm
Productivity		
Maximum lift capacity	10,000 lbs	4,536 kg
Lift capacity at maximum height	5,000 lbs	2,268 kg
Lift capacity at maximum reach	3,000 lbs	1,361 kg
Raise/Lower boom	15/12 sec	
Extend/Retract	23/30 sec	
Frame leveling	10° side to side	
Drive speed, 74 hp Powershift	15 mph	
74 hp CVT	19 mph	
120 hp Powershift	18 mph	
Draw bar pull: 74hp Powershift	21,380 lbs	9,679 kg
74hp CVT	22,700 lbs	10,290 kg
120hp Powershift	23,110 lbs	10,482 kg
Turning radius, curb to curb (AWS)	14 ft 6 in	4.42 m
Auxiliary hydraulic flow (AWS)	2-10 gpm	7.6-38.0 lpm
Auxiliary hydraulic pressure	3,200 psi	220 bar
Tires, standard size	Genie Endure A/T 400/75-28	
Power		
Power source	Deutz TCD 3.6 L Tier 4f 74 HP (55 kW)	
Electrical system	System voltage 12 volt Alternator 95 amp Battery 1000 CCA at 0°F (-18°C)	
Hydraulic tank capacity	27 gal	102.2 L
Hydraulic system capacity (w/tank)	52 gal	199.2 L
Fuel tank capacity	30 gal	113.6 L
Weight*		
	31,416 lb	14,250 kg

Load Chart GTH™-1056**

CON MOTOR JOHN DEERE 4045HF285, MARCA EN HORAS 9,338, ALCANCE DE 56 FT, NEUMATICOS 14.00-24, PESO 31,416 LBS, - -